

Titre: Collaborative decision-making in product design: An interactive
Title: multiobjective approach

Auteurs: Chantal Baril, Soumaya Yacout, & Bernard Clément
Authors:

Date: 2013

Type: Article de revue / Article

Référence: Baril, C., Yacout, S., & Clément, B. (2013). Collaborative decision-making in
Citation: product design: An interactive multiobjective approach. Journal of Industrial
Engineering, 2013, 12 pages. <https://doi.org/10.1155/2013/201907>

Document en libre accès dans PolyPublie

Open Access document in PolyPublie

URL de PolyPublie: <https://publications.polymtl.ca/4768/>
PolyPublie URL:

Version: Version officielle de l'éditeur / Published version
Révisé par les pairs / Refereed

Conditions d'utilisation: Creative Commons Attribution 4.0 International (CC BY)
Terms of Use:

Document publié chez l'éditeur officiel

Document issued by the official publisher

Titre de la revue: Journal of Industrial Engineering (vol. 2013)
Journal Title:

Maison d'édition: Hindawi
Publisher:

URL officiel: <https://doi.org/10.1155/2013/201907>
Official URL:

Mention légale:
Legal notice:

Research Article

Collaborative Decision-Making in Product Design: An Interactive Multiobjective Approach

Chantal Baril,¹ Soumaya Yacout,² and Bernard Clément²

¹ *Department of Industrial Engineering, Université du Québec à Trois-Rivières, 3351 Boulevard des Forges, Trois-Rivières, QC, Canada G9A 5H7*

² *Department of Mathematical and Industrial Engineering, École Polytechnique de Montréal, 2900 Boulevard Édouard-Montpetit, Campus de l'Université de Montréal, Montréal, QC, Canada H3T 1J4*

Correspondence should be addressed to Chantal Baril; chantal.baril@uqtr.ca

Received 16 August 2012; Accepted 29 October 2012

Academic Editor: C. K. Kwong

Copyright © 2013 Chantal Baril et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

This paper presents a new procedure to solve multiobjective problems, where the objectives are distributed to various working groups and the decision process is centralized. The approach is interactive and considers the preferences of the working groups. It is based on two techniques: an interactive technique that solves multi-objective problems based on goal programming, and a technique called “linear physical programming” which considers the preferences of the working groups. The approach generates Pareto-optimal solutions. It guides the director in the determination of target values for the objective functions. The approach was tested on two problems that present its capacity to generate Pareto-optimal solutions and to show the convergence to compromise solutions for all the working groups.

1. Introduction

The process of product design is often organized in a hierarchical structure where the specialists are separated by discipline in several working groups. As shown in Figure 1, the working groups are supervised by a director who coordinates the design activities. The role of the director is to collect information provided by the groups and to use computational method to finding an optimal design. The working groups are considered as experts that have the technical knowledge in their proper discipline.

According to their competencies, each working group is responsible of achieving specific design objectives expressing the customer's requirements. Often these objectives are functions of the same set of design variables and in certain cases, they may be conflicting. For that reason, it is necessary to find an optimization procedure that takes into consideration that knowledge and includes it in the solution.

In this paper, we develop a new Interactive Multiobjective approach taking into account the working group's Preferences

(IMOP). The original contributions of the IMOP algorithm are the as follows.

- (i) It has the ability to define a reduced set of target values that can be divided into degrees of desirability to capture the working groups' preferences. This is an important contribution because it is a challenging issue in multi-objective optimization.
- (ii) It generates Pareto-optimal solutions corresponding to the working groups' preferences.
- (iii) It subtracts the stability set from the reduced set of target values at each iteration, thus ensuring a different Pareto-optimal solution each time.

The proposed approach is particularly interesting when the decision process is centralized and involves many working groups who are collaborating in order to find a best compromise solution.

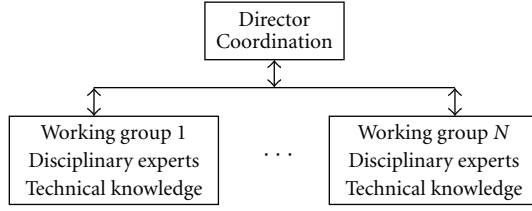


FIGURE 1: Organizational structure in product design.

2. Multiobjective Problem and Pareto-Optimal Concept

The purpose of a general multi-objective optimization problem is to find the design variables that optimize a vector objective function $F(X) = \{f_1(X), f_2(X), \dots, f_k(X)\}$ over the feasible design space. The minimization problem formulation in standard form is as follows [1]:

$$\begin{aligned}
 &\text{Minimize} && F(X) = \{f_1(X), f_2(X), \dots, f_k(X)\} \\
 &\text{subject to} && h_s(X) = 0, \quad s = 1, \dots, t, \\
 &&& g_r(X) \geq 0, \quad r = 1, \dots, m, \\
 &&& X^l \leq X \leq X^u.
 \end{aligned} \tag{1}$$

The aim of solving a multi-objective problem is to get a Pareto-optimal solution or a set of Pareto-optimal solutions. Conceptually, a Pareto-optimal solution is one which is not dominated by any other feasible solution. Mathematically, for a minimization problem with k objective functions f_i , $i = 1, \dots, k$, a vector X^* is Pareto-optimal if there is no other feasible X such that $f(X) \leq f(X^*)$, meaning that $f_i(X) \leq f_i(X^*)$ for all $i = 1, \dots, k$ with strict inequality for at least one i [2]. In general, the optimal solutions obtained by the individual optimization of the objectives are not the same. It is then necessary to find solutions to the multi-objective problem which are Pareto-optimal.

There are several techniques for solving multi-objective optimization problems. Some methods have been developed to find an exact Pareto set, or an approximation of it, inside of which one of the generated Pareto optimal solutions is chosen for implementation. These methods include compromise programming [3], the weight method, and the constraints method [4]. Several metaheuristics approaches have also been used to solve multi-objective problems like simulated annealing [5, 6] particles swarm optimization [7] and evolutionary algorithms [8–10].

However, as the number of competing objectives increases, the problem of finding the best compromise solution becomes increasingly complex. Hence, it can become overwhelming to analyze the entire Pareto-optimal solution set to select one solution for implementation. It becomes attractive to reduce the size of the solution set, and to assist the decision maker in selecting a final solution [11]. Some methods attempt to quantify the decision maker's preferences, and with this information, the solution that best satisfies the decision maker's preferences is then identified. These methods include among others goal programming,

and linear physical programming [12]. Linear physical programming is a method for generating a preferred Pareto solution during multi-objective optimization. It is an extension of goal programming. The initial development of the physical programming methodology is presented in Messac et al. [12]. Physical programming captures the decision maker's preferences, a priori, in a mathematically consistent manner using a preference function. The decision maker (DM) classifies each objective function into the four soft and the four hard classes as shown in Table 1.

The DM specifies the degrees of desirability $(t_{i5}^-, t_{i4}^-, t_{i3}^-, t_{i2}^-, t_{i1}^-)$ and/or $(t_{i1}^+, t_{i2}^+, t_{i3}^+, t_{i4}^+, t_{i5}^+)$ for each objective function f_i in the soft category. For classes 1S through 4S, there are, respectively, five, nine, and ten such values as shown in Tables 2, 3, 4, and 5.

For classes 1H through 4H, these values are, respectively, $t_{l,\max}$, $t_{l,\min}$, $t_{l,\text{val}}$, and $t_{l,\min}$ and $t_{l,\max}$. The physical programming method involves converting a multi-objective problem into a single objective problem by using preference functions that capture the DM's preferences. Given the DM's input in the form of range boundaries (or targets) for each objective, Messac et al. [12] suggest an algorithm to generate the weights \bar{w}_{is}^- and \bar{w}_{is}^+ . The following problem is then solved (d_{is}^- and d_{is}^+ are the deviational variables):

$$\begin{aligned}
 &\text{Min}_{d_{is}^-, d_{is}^+, X} && J = \sum_{i=1}^k \sum_{s=2}^5 (\bar{w}_{is}^- d_{is}^- + \bar{w}_{is}^+ d_{is}^+) \\
 &\text{subject to} && f(X)_i - d_{is}^+ \leq t_{i(s-1)}^+ \\
 &&& \forall i \in \text{classes 1S, 3S, 4S}; \quad i = 1, 2, \dots, k; \\
 &&& \quad \quad \quad s = 2, \dots, 5, \\
 &&& d_{is}^+ \geq 0 \quad \forall i \in \text{classes 1S, 3S, 4S}; \\
 &&& \quad \quad \quad i = 1, 2, \dots, k; \quad s = 2, \dots, 5 \\
 &&& f_i(X) \leq t_{i5}^+ \quad \forall i \in \text{classes 1S, 3S, 4S}; \\
 &&& \quad \quad \quad i = 1, 2, \dots, k, \\
 &&& f_i(X) + d_{is}^- \geq t_{i(s-1)}^-, \quad \forall i \in \text{classes 2S, 3S, 4S}; \\
 &&& \quad \quad \quad i = 1, 2, \dots, k; \quad s = 2, \dots, 5, \\
 &&& d_{is}^- \geq 0, \quad \forall i \in \text{classes 2S, 3S, 4S}; \\
 &&& \quad \quad \quad i = 1, 2, \dots, k; \quad s = 2, \dots, 5, \\
 &&& f_i(X) \geq t_{i5}^-, \quad \forall i \in \text{classes 2S, 3S, 4S}; \\
 &&& \quad \quad \quad i = 1, 2, \dots, k, \\
 &&& f_l(X) \leq t_{l,\max}, \quad \forall l \in \text{class 1H}; \\
 &&& \quad \quad \quad l = 1, 2, \dots, L, \\
 &&& f_l(X) \geq t_{l,\min}, \quad \forall l \in \text{class 2H}; \\
 &&& \quad \quad \quad l = 1, 2, \dots, L, \\
 &&& f_l(X) = t_{l,\text{val}}, \quad \forall l \in \text{class 3H}; \\
 &&& \quad \quad \quad l = 1, 2, \dots, L,
 \end{aligned}$$

$$\begin{aligned}
t_{l,\min} \leq f_l(X) \leq t_{l,\max}, \quad \forall l \in \text{class } 4H; \\
l = 1, 2, \dots, L, \\
X_{\min} \leq X \leq X_{\max}.
\end{aligned} \tag{2}$$

The limitation of the physical programming is that it requires a priori selection of range parameters for each of the objective functions and provides information for only one design scenario (i.e., a single Pareto solution). Tappeta et al. [13] have twinned linear physical programming with an interactive algorithm [1]. Their algorithm finds a Pareto solution and can generate other Pareto designs in the neighbourhood of the current Pareto solution. No means are provided to help the DM to specify his/her initial preferences in the form of region limits defined in physical programming.

Some authors have suggested several interactive multi-objective optimization methods [1, 14–16]. These methods allow the decision maker to express his/her preferences by using a reference point or by classifying the objectives, functions. The disadvantages of using traditional multi-objective methods are as follows [1]: (1) require a priori selection of weights or targets for each of the objective functions, (2) provide only a single Pareto-optimal solution, and (3) are unable to generate proper Pareto-optimal points for non convex problems (the weights method). Abdel Haleem [17] developed an interactive nonlinear goal programming algorithm (INLGP) that helps the decision maker to determine reference points for the goals. The decision maker does not need to do any ranking of classification of these goals. The advantages of this INLGP algorithm are as follows: (1) it reduces the parametric space of the target values by limiting each parameter with minimum and maximum values rather than by choosing any random values from the whole parametric space, and (2) the algorithm is guaranteed to generate Pareto-optimal solutions at each iteration. The INLGP algorithm was used for the design of a low-pass electrical circuit [18]. However, no means are provided to divide the reduced parametric space. Realizing these limitations, an interactive multi-objective approach is proposed which attempts to address the issues mentioned above.

3. An Interactive Multiobjective Approach Taking into Account the Working Groups' Preferences (IMOP Approach)

The IMOP approach is based on the interactive nonlinear goal programming algorithm (INLGP) of Abdel Haleem [17] combined to the linear physical programming introduced by Messac et al. [12]. The IMOP approach has the following advantages: (1) it provides means to capture the working group's preferences, (2) it offers the possibility of interaction between the director and his/her working groups, (3) it generates several Pareto-optimal solutions (several design scenarios), and (4) it fits with the industries organizational structure.

Before using the IMOP approach, it is necessary to distribute the objective functions among the working groups

TABLE 1: Objective function classification.

Soft	Class 1S	Small is better (minimization)
	Class 2S	Larger is better (maximization)
	Class 3S	Value is better
	Class 4S	Range is better
Hard	Class 1H	Must be smaller ($f_l \leq t_{l,\max}$)
	Class 2H	Must be larger ($f_l \geq t_{l,\min}$)
	Class 3H	Must be equal ($f_l = t_{l,\text{val}}$)
	Class 4H	Must be in range ($t_{l,\min} \leq f_l \leq t_{l,\max}$)

according to their respective disciplinary competencies. More than one objective can be assigned to the same working group. The multi-objective optimization process is centralized at the director level. The director coordinates the activities between the working groups. The working groups collaborate to the resolution process by defining their preferences and providing the target values for their objective functions. The following are the steps involved in the application of the new interactive multi-objective approach.

Step 1. Each working group classifies his objective functions into four classes (Table 6).

Step 2. For the k objective functions, each working group solves its objective optimization problem individually according to a category chosen in 1. The optimal solutions are X^{*i} , $i = 1, \dots, k$. The optimal values of the objective functions are f_i^* , $i = 1, \dots, k$. The working groups know the best possible values of each objective function under their control. These values are returned to the director.

Step 3. The director evaluates the value of the other $k-1$ objective functions at the k optimal solutions X^{*i} , $i = 1, \dots, k$, and constructs $k \times k$ table of the objectives values as shown in Table 7. From this table, the director will know the best and the worst possible values of each objective function f_i^* , $i = 1, \dots, k$ that corresponding to $b_{i,\min}$, $b_{i,\max}$, $i = 1, \dots, k$ of each objective function (for a minimization problem). The approach proceeds by determining the reduced solvability set denoted by D' where $D' = \{D \mid b_{i,\min} \leq b_i \leq b_{i,\max}, i = 1, \dots, k\}$ and D is the set of parameter values for which the problem is solvable. The reduced solvability set will be used by the working groups to define their preference according to their competencies.

Step 4. The director presents the reduced solvability set D' to the working groups to seek preferences for each objective function.

- (i) For class 1S (minimization), the preferences are highly desirable (t_{i1}^+), desirable (t_{i2}^+), tolerable (t_{i3}^+), undesirable, and (t_{i4}^+) and highly undesirable (t_{i5}^+).
- (ii) For class 2S (maximization), the preferences are highly desirable (t_{i1}^-), desirable (t_{i2}^-), tolerable (t_{i3}^-), undesirable (t_{i4}^-), and highly undesirable (t_{i5}^-).

- (iii) For class 3S (value is better), the preferences are highly desirable (t_{i1}), desirable (t_{i2}^- and t_{i2}^+), tolerable (t_{i3}^- and t_{i3}^+), undesirable (t_{i4}^- and t_{i4}^+) and highly undesirable (t_{i5}^- and t_{i5}^+).
- (iv) For class 4S (range is better), the preferences are highly desirable (t_{i1}^- and t_{i1}^+), desirable (t_{i2}^- and t_{i2}^+), tolerable (t_{i3}^- and t_{i3}^+), undesirable (t_{i4}^- and t_{i4}^+), and highly undesirable (t_{i5}^- and t_{i5}^+).

For multi-objective problem, the director has not all the necessary competencies to choose these values. It is why the collaboration of the working groups is important. For example, the following scenario can be used to define the degrees of desirability for a pure mathematical minimization problem. Supposing that $t_{i1}^+ = b_{i\text{Min}}$, $t_{i5}^+ = b_{i\text{Max}}$ and $(b_{i\text{Max}} - b_{i\text{Min}})/4 = v_i$, the reduced solvability set D' can be divided as follows: $t_{i1}^+ = b_{i\text{Min}}$, $t_{i2}^+ = t_{i1}^+ + v_i$, $t_{i3}^+ = t_{i2}^+ + v_i$, $t_{i4}^+ = t_{i3}^+ + v_i$, and $t_{i5}^+ = b_{i\text{Max}}$. For design problem, these values are set according to the working groups' competencies and customer's requirements.

Step 5. Set solution $j = 1$. Each working group selects the target value b_i for each of their objective functions and transfers these values to the director.

Step 6. The director uses the algorithm proposed by Dauer and Krueger [19] to solve the following multiobjective goal programming problem and to obtain the Pareto-optimal solution \bar{X}_j . This algorithm is detailed in Appendix A. The last attainment problem for goal k twinned with the linear physical programming is (P_k)

$$\begin{aligned} &\text{Minimize } d_k \\ &\text{subject to } M(b) = \{X \in R^n \mid g_r(X) \leq b_r, r = 1, \dots, m, X \geq 0\} \end{aligned} \quad (3)$$

and for classes 1S, 3S, and 4S

$$\begin{aligned} g_{m+i}(X) &\equiv f_i(X) - d_i \leq b_i, \quad 1 \leq i \leq k, \\ d_i &= d_i^*, \quad 1 \leq i \leq k-1, \\ f_i(X) &\leq t_{i5}^+, \quad 1 \leq i \leq k, \\ d_k &\geq 0 \end{aligned} \quad (4)$$

and for classes 2S, 3S, and 4S

$$\begin{aligned} g_{m+i}(X) &\equiv f_i(X) + d_i \geq b_i, \quad 1 \leq i \leq k, \\ d_i &= d_i^*, \quad 1 \leq i \leq k-1, \\ f_i(X) &\geq t_{i5}^-, \quad 1 \leq i \leq k, \\ d_k &\geq 0. \end{aligned} \quad (5)$$

For all classes

$$X_{\min} \leq X \leq X_{\max}. \quad (6)$$

Note. The constraints $g_{m+i}(X)$ are called the goals constraints.

This step permits to find a solution that meets as much as possible the working group's preferences.

Step 7. If the working groups are satisfied with this solution, stop and go to Step 13, if not, go to Step 8. It is suggested to generate a certain number of optimal solutions, which are Pareto optimal before stopping.

Step 8. The director formulates the KKT conditions of the problem (P_k) and determines the values of the Kuhn Tucker multipliers associated with the goals constraints: \bar{u}_r , $r = 1, \dots, k + m$.

Step 9. According to the values \bar{u}_r and by using the algorithm presented in Appendix B, the director determines the stability set of the first kind $G(\bar{X}_j)$ which is the set of parameter values for which the optimal solution remains optimal.

Step 10. The director uses the sets subtraction algorithm presented in Appendix C to obtain the new reduced solvability set $\{D' - \bigcup_{p=1}^j G(\bar{X}_p)\}$ which excludes the stability set. Steps 8, 9, and 10 are necessary to ensure that the work groups will choose target values leading to other Pareto-optimal solution.

Step 11. If no values can be chosen in $\{D' - \bigcup_{p=1}^j G(\bar{X}_p)\}$, stop and go to Step 13, otherwise go to Step 12.

Step 12. Set $j = j + 1$. The working groups select other target values $b_i \in \{D' - \bigcup_{p=1}^{j-1} G(\bar{X}_p)\}$ and go to Step 6. One can use these rules to select the values and to obtain other Pareto optimal solutions.

- (i) Rule no. 1: It is always necessary to improve the objective function having the worst value by choosing its target value in a better zone and by sacrificing the other objectives by choosing their target values in a less desirable zone. The aim of these choices is to obtain, if possible, all the objective's values in the tolerable zone (or better).
- (ii) Rule no. 2: Once in the tolerable zone, try other values in this zone in order to obtain other Pareto-optimal solutions. The selected values should cover all the zone. For example, choose a value at one end of the tolerable zone and the other values at the other end. One can also try to choose one of the target values in the desirable zone while leaving the other target values in the tolerable zone.
- (iii) Rule no. 3: if it is impossible to follow the first rule due to the reduced solvability set, try all the possibilities to find the best choice.

Step 13. The director presents all the Pareto-optimal solutions to the working groups and tries to get consensus for the best compromise. If other solutions are necessary, go to Step 12.

TABLE 2: Degrees of desirability for class 1S.

Class 1S—smaller is better (i.e., minimization)				
$f_i \leq t_{i1}^+$	$t_{i1}^+ < f_i \leq t_{i2}^+$	$t_{i2}^+ < f_i \leq t_{i3}^+$	$t_{i3}^+ < f_i \leq t_{i4}^+$	$t_{i4}^+ < f_i \leq t_{i5}^+$
Highly desirable	Desirable	Tolerable	Undesirable	Highly undesirable

TABLE 3: Degrees of desirability for class 2S.

Class 2S—larger is better (i.e., maximization)				
$t_{i5}^- \leq f_i < t_{i4}^-$	$t_{i4}^- \leq f_i < t_{i3}^-$	$t_{i3}^- \leq f_i < t_{i2}^-$	$t_{i2}^- \leq f_i < t_{i1}^-$	$t_{i1}^- \leq f_i$
Highly undesirable	Undesirable	Tolerable	Desirable	Highly desirable

TABLE 4: Degrees of desirability for class 3S.

Class 3S—value is better (i.e., seek value)								
$t_{i5}^- \leq f_i < t_{i4}^- \leq f_i < t_{i3}^- \leq f_i < t_{i2}^- \leq f_i < t_{i1}^- < f_i \leq t_{i2}^+ < f_i \leq t_{i3}^+ < f_i \leq t_{i4}^+ < f_i \leq t_{i5}^+$								
Highly undesirable	Undesirable	Tolerable	Desirable	Highly desirable	Desirable	Tolerable	Undesirable	Highly undesirable

TABLE 5: Degrees of desirability for class 4S.

Class 4S—range is better (i.e., seek range)								
$t_{i5}^- \leq f_i < t_{i4}^- \leq f_i < t_{i3}^- \leq f_i < t_{i2}^- \leq f_i < t_{i1}^- \leq f_i \leq t_{i1}^+ < f_i \leq t_{i2}^+ < f_i \leq t_{i3}^+ < f_i \leq t_{i4}^+ < f_i \leq t_{i5}^+$								
Highly undesirable	Undesirable	Tolerable	Desirable	Highly desirable	Desirable	Tolerable	Undesirable	Highly undesirable

TABLE 6: Classification of the objective functions.

Class 1S	Small is better (minimization)
Class 2S	Larger is better (maximization)
Class 3S	Value is better (seek value)
Class 4S	Range is better (seek range)

TABLE 7: Table of objectives values.

Optimal solutions	Objective functions			
X^{*1}	$f_1^*(X^{*1})$	$f_2^*(X^{*1})$...	$f_i^*(X^{*1})$
X^{*2}	$f_1^*(X^{*2})$	$f_2^*(X^{*2})$...	$f_i^*(X^{*2})$
...
X^{*i}	$f_1^*(X^{*i})$	$f_2^*(X^{*i})$...	$f_i^*(X^{*i})$

4. Numerical Examples

In this section, the interactive multi-objective procedure is applied to two design problems. The first problem consists of a set of simple analytical expressions for its objective and constraint functions and was presented by Tappeta et al. [13]. This problem is chosen to illustrate the key features of the approach and to compare with the results obtained by those authors. The second problem is the design of a two-bar structure that is subjected to a force, F , at a point that vertically deflects by an amount d . In both cases, the IMOP approach is implemented in Matlab 7.0.4.365 (R14) and the optimization process was conducted on Pentium D duo core 3.4 GHz and 2 GB RAM. The computational time is less than 1 minute.

4.1. Test Problem 1. This problem was introduced by Tappeta et al. [13] and has three design variables, three objective functions, and a constraint. The problem definition in standard form and the application of the IMOP approach are as follows:

$$\text{Minimize } F(X) = \{f_1(X), f_2(X), f_3(X)\}$$

$$\text{subject to } g_1(X) = 12 - x_1^2 - x_2^2, \quad (7)$$

$$X \geq 0,$$

where

$$f_1(X) = 10 - \frac{(x_1^3 + x_1^2(1 + x_2 + x_3) + x_2^3 + x_3^3)}{10},$$

$$f_2(X) = 15 - \frac{(x_1^3 + 2x_2^3 + x_2^2(2 + x_1 + x_3) + x_3^3)}{10}, \quad (8)$$

$$f_3(X) = 20 - \frac{(x_1^3 + x_2^3 + 3x_3^3 + x_3^2(3 + x_1 + x_2))}{10}.$$

For this example, we suppose that $f_1(X)$ and $f_2(X)$ needed specific competencies so they are assigned to a working group and $f_3(X)$ need other competencies so it is assigned to another group. Therefore, the procedure proceeds with a director and two working groups.

Step 1. Each working group classifies its objective functions:

Working group 1 classifies $f_1(X)$ in class 1S,

Working group 1 classifies $f_2(X)$ in class 1S,

Working group 2 classifies $f_3(X)$ in class 1S.

Step 2. For the k objective functions, each working group solves its single optimization problem individually according

TABLE 8: Optimal values for the objective functions of test Problem 1.

X^{*i}	x_1	x_2	x_3	f_i^*
Working group 1	3.2539	0.8402	0.8402	3.5980
Working group 1	0.4651	3.4011	0.4651	3.7221
Working group 2	0.3169	0.3169	3.4350	3.5471

to the category chosen in 1. The optimal solutions are X^{*i} , $i = 1, \dots, k$. The optimal values of the objective functions are noted to be f_i^* , $i = 1, \dots, k$ and are presented in Table 8.

Step 3. The director evaluates the value of the other $k - 1$ objective function at the k optimal solutions and constructs the $k \times k$ table of the objective values. From Table 9, the director knows the best and the worst values for each objective function. These values are noted to be $b_{i\min}$, $b_{i\max}$, $i = 1, \dots, k$. The approach proceeds by determining the reduced solvability set $D' = \{D \mid b_{i\min} \leq b_i \leq b_{i\max}, i = 1, \dots, k\}$ where D is the set of parameters for which the problem is solvable.

The reduced solvability set is

$$\begin{aligned} 3.5980 &\leq b_1 \leq 5.9405, \\ 3.7221 &\leq b_2 \leq 10.9465, \\ 3.5471 &\leq b_3 \leq 15.8771. \end{aligned}$$

Step 4. The director presents the reduced solvability set D' to the working groups to seek their preferences for each objective function. These values are set according to the working groups' knowledge and experience. For class 1S, each working group determines the degrees of desirability $t_{i1}^+, t_{i2}^+, t_{i3}^+, t_{i4}^+, t_{i5}^+$. Table 10 shows the degrees of desirability fixed by Tappeta et al. [13]. These degrees of desirability are used to be able to compare the results.

It is obvious that the degrees of desirability t_{i2}^+ for the objective functions f_1 and f_2 could never be reached, since they are not included in the reduced solvability set: the minimal value for the objective function f_1 is 3.5980 and for f_2 is 3.7221. This example shows that the degrees of desirability should not be given blindly to prevent the choice of scenarios which are not feasible. Table 11 shows more realistic degrees of desirability. These degrees of desirability are obtained by dividing the solvability set $3.5980 \leq b_1 \leq 5.9405$, $3.7221 \leq b_2 \leq 10.9465$ and $3.5471 \leq b_3 \leq 15.8771$ according to this scenario: we suppose that the worst value is undesirable ($t_{i4}^+ = b_{i\max}$) and we calculate $(b_{i\max} - b_{i\min})/4 = v_i$ to find the following degrees of desirability: $t_{i1}^+ = t_{i2}^+ - v_i$, $t_{i2}^+ = t_{i3}^+ - v_i$, $t_{i3}^+ = t_{i4}^+ - v_i$, $t_{i4}^+ = b_{i\max}$, and $t_{i5}^+ = t_{i4}^+ + v_i$.

We assume that preferences are uniformly distributed across the solvability set but it is not necessarily always the case.

Step 5. Set solution $j = 1$. The working groups select the target values b_i for each objective function. It is obvious that

TABLE 9: Objective function values table for test Problem 1.

	x_1	x_2	x_3	f_1	f_2	f_3
X^{*1}	3.2539	0.8402	0.8402	3.5980	10.9465	15.8166
X^{*2}	0.4651	3.4011	0.4651	5.9405	3.7221	15.8771
X^{*3}	0.3169	0.3169	3.4350	5.8929	10.8797	3.5471

TABLE 10: The degrees of desirability specified by Tappeta et al. [13].

Criteria	Class	HD t_{i1}^+	D t_{i2}^+	T t_{i3}^+	U t_{i4}^+	HU t_{i5}^+
f_1	1S	3.0	4.25	6.0	7.5	9.0
f_2	1S	3.7	7.0	9.25	11.8	12.5
f_3	1S	6.0	12.0	15.0	18.0	20.0

HD: (highly desirable $\leq t_{i1}^+$), D: ($t_{i1}^+ < \text{desirable} \leq t_{i2}^+$), T: ($t_{i2}^+ < \text{tolerable} \leq t_{i3}^+$), ID: ($t_{i3}^+ < \text{undesirable} \leq t_{i4}^+$), IA: ($t_{i4}^+ < \text{highly undesirable} \leq t_{i5}^+$).

TABLE 11: The working group's preferences for test Problem 1.

Criteria	Class	I t_{i1}^+	D t_{i2}^+	T t_{i3}^+	ID t_{i4}^+	IA t_{i5}^+
f_1	1S	4.1836	4.7693	5.3549	5.9405	6.5261
f_2	1S	5.5282	7.3343	9.1404	10.9465	12.7526
f_3	1S	6.6296	9.7121	12.7946	15.8771	18.9596

HD: (highly desirable $\leq t_{i1}^+$), D: ($t_{i1}^+ < \text{desirable} \leq t_{i2}^+$), T: ($t_{i2}^+ < \text{tolerable} \leq t_{i3}^+$), ID: ($t_{i3}^+ < \text{undesirable} \leq t_{i4}^+$), IA: ($t_{i4}^+ < \text{highly undesirable} \leq t_{i5}^+$).

each working group wants to obtain the better value for their objective functions. So they will choose target values in the highly desirable zone. We assume that the approach starts with the target values corresponding to t_{i1}^+ :

Working group 1 sets the target value of b_1 at 4.1836 (highly desirable),

Working group 2 sets the target value of b_2 at 5.5282 (highly desirable),

Working group 3 sets the target value of b_3 at 6.6296 (highly desirable).

Step 6. With the target values supplied by the working groups, the director uses the algorithm proposed by Dauer and Krueger [19] given in Appendix A to solve the multi-objective goal programming problem and to obtain a first Pareto optimal solution \bar{X}_1 :

$$\bar{X}_1 = (2.8568, 1.8775, 0.5598),$$

$f_1 = 4.1836$ (the value of f_1 is in the highly desirable zone),

$f_2 = 9.4178$ (the value of f_2 is in the undesirable zone),

$f_3 = 16.7115$ (the value of f_3 is in the highly undesirable zone).

Step 7. If the working groups are satisfied with this solution, stop and go to Step 13, if not, go to Step 8. For this case,

we assume that the working groups 1 and 2 are not satisfied since the values of their objective functions f_2 and f_3 are in the undesirable and highly undesirable zones, respectively, and want to generate another solution. Go to Step 8. Steps 8, 9, and 10 are necessary to ensure that the work groups will choose target values leading to other Pareto-optimal solution.

Step 8. The director formulates the KKT conditions of the problem and determines the values of the Kuhn Tucker multipliers associated with the goal constraints \bar{u}_r , $r = 1, \dots, k + m$,

$$\bar{u}_2 = 1.2771 \times 10^5, \quad \bar{u}_3 = 5.6776 \times 10^4, \quad \bar{u}_4 = 1. \quad (9)$$

Step 9. According to the values \bar{u}_r , and by using the algorithm of Osman [20] given in Appendix B, the director determines the stability set $G(\bar{X}_1)$

Given $\bar{u}_2 > 0$ and $g_2 = 4.1836$ then $b_1 = 4.1836$,

Given $\bar{u}_3 > 0$ and $g_3 = 5.5282$ then $b_2 = 5.5282$,

Given $\bar{u}_4 > 0$ and $g_4 = 6.6296$ then $b_3 = 6.6296$.

Step 10. The director uses the sets subtraction algorithm proposed by Abdel Haleem [17] given in Appendix C to obtain the new reduced solvability set $\{D' - \bigcup_{p=1}^j G(\bar{X}_p)\}$ given in Table 12.

Step 11. If no values can be selected in $\{D' - \bigcup_{p=1}^j G(\bar{X}_p)\}$ stop and go to Step 13, otherwise go to Step 12. In this case, other values can be chosen in Table 10 so go to Step 12.

Step 12. Set $j = j + 1$. The working groups select other target values for their objective function in $b^j \in \{D' - \bigcup_{p=1}^{j-1} G(\bar{X}_p)\}$ and go to Step 6. The solutions obtained are presented in Table 13.

The third Pareto-optimal solution seems to be the best one because all the objective values match the target values according to Table 10. This solution can be considered satisfactory and a good compromise for all the working groups.

Step 13. The director presents the Pareto-optimal solutions obtained to the working groups to select the best one for everyone (stop). If other solutions are necessary go to Step 12. Although the solutions obtained in the six iterations are Pareto optimal, the best Pareto-optimal solutions according to the working group's preferences (desirability) are solutions 3 and 4. These solutions can be retained for implementation.

Finally, it is also interesting to know if the solutions (Pareto points) obtained by this approach are close to certain targeted aspiration points. To do this, we compare the obtained results with the Pareto-optimal results obtained by

TABLE 12: The reduced solvability set for test Problem 1.

Set number	b_1 min	b_1 max	b_2 min	b_2 max	b_3 min	b_3 max
1	3.5980	4.1836	3.7221	10.9465	3.5471	15.8771
2	4.1836	5.9405	3.7221	10.9465	3.5471	15.8771
3	4.1836	4.1836	3.7221	5.5282	3.5471	15.8771
4	4.1836	4.1836	5.5282	10.9465	3.5471	15.8771
5	4.1836	4.1836	5.5282	5.5282	3.5471	6.6296
6	4.1836	4.1836	5.5282	5.5282	6.6296	15.8771

TABLE 13: Pareto-optimal solutions generated by the approach.

Solution j	Target values b_i	Objective function values f_i
1	$b_1 = 4.1836$ (highly desirable)	$f_1 = 4.1836$ (highly desirable)
	$b_2 = 5.5282$ (highly desirable)	$f_2 = 9.4178$ (undesirable)
	$b_3 = 6.6296$ (highly desirable)	$f_3 = 16.7115$ (highly undesirable)
2	$b_1 = 4.5$ (desirable)	$f_1 = 4.5$ (desirable)
	$b_2 = 8$ (tolerable)	$f_2 = 8.6799$ (tolerable)
	$b_3 = 13$ (undesirable)	$f_3 = 16.8579$ (highly undesirable)
3	$b_1 = 5.2$ (tolerable)	$f_1 = 5.2$ (tolerable)
	$b_2 = 9$ (tolerable)	$f_2 = 9$ (tolerable)
	$b_3 = 14$ (undesirable)	$f_3 = 14.8087$ (undesirable)
4	$b_1 = 5.3$ (tolerable)	$f_1 = 5.3$ (tolerable)
	$b_2 = 9.1$ (tolerable)	$f_2 = 9.1$ (tolerable)
	$b_3 = 12.5$ (tolerable)	$f_3 = 14.4381$ (undesirable)
5	$b_1 = 5.9$ (undesirable)	$f_1 = 5.9$ (undesirable)
	$b_2 = 8.9$ (tolerable)	$f_2 = 8.9$ (tolerable)
	$b_3 = 12.6$ (tolerable)	$f_3 = 13.0147$ (undesirable)
6	$b_1 = 5$ (tolerable)	$f_1 = 5$ (tolerable)
	$b_2 = 10$ (undesirable)	$f_2 = 10$ (undesirable)
	$b_3 = 12$ (tolerable)	$f_3 = 13.9899$ (undesirable)

Tappeta et al. [13] at specific aspiration points. The comparison is presented in Table 14.

For a minimization problem, we want to find a better (smaller) solution than or equal the aspiration values. The symbol (+) indicates that the solution obtained by our approach is worse (bigger) than the aspiration values, the symbol (=) indicates that the solution obtained is the same (equal) as the aspiration values, and the symbol (−) indicates that the solution obtained is better (smaller) than the aspiration values. The solutions obtained with our algorithm are considered better than or equal to those found by Tappeta et al. [13] if the number of symbols (−) and (=) exceeds the number of symbols (+). For the first solution, the number of symbols (−) and (=) is 2 for the IMOP algorithm and the number of symbols (−) and (=) is 1 for Tappeta et al. [13]. These results are very encouraging because they demonstrate that our approach can find solutions closer to the working

TABLE 14: Aspiration points and Pareto data from Tappeta et al. [13].

Aspiration values (target values)			Pareto points Tappeta et al. [13]			Pareto points IMOP approach		
1	2	3	1	2	3	1	2	3
7.483	6.788	11.285	6.956 (-)	7.437 (+)	11.496 (+)	6.9722 (-)	6.7880 (=)	12.3239 (+)
5.400	6.788	16.927	5.413 (+)	6.916 (+)	16.218 (-)	4.4679 (-)	5.1878 (-)	16.3795 (-)
6.016	10.183	11.285	3.994 (-)	10.095 (-)	16.130 (+)	6.0002 (-)	9.9646 (-)	10.7528 (-)
3.933	10.183	16.927	4.708 (+)	8.689 (-)	16.259 (-)	3.9235 (-)	10.0191 (-)	16.4693 (-)

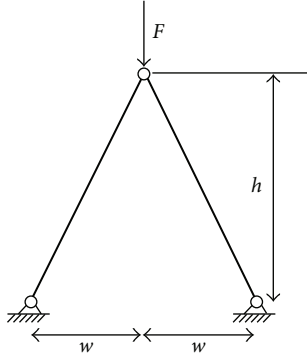


FIGURE 2: Two-bar truss example.

group's requirements (aspiration values) than algorithms available in the literature.

4.2. Test Problem 2. The second problem is the design of a two-bar structure that is subjected to a force, F , at a point that vertically deflects by an amount, d . This optimization problem involves the minimization of the mass, m , the normal stress, s , and the vertical deflection, d , of a two-bar truss. The design variables are the diameter of the member, $x_1 = a$, and the height, $x_2 = h$. Normal stress must be less than the buckling stress, as a constraint. A graphical representation of the truss is shown in Figure 2 [21]. The specific parameter values are as follows: $F = 150$ kN, $t = 2.5$ mm, structure width $w = 750$ mm, mass density $\rho = 7.8 \times 10^{-3}$ g/mm³, and elastic modulus $E = 210000$ N·mm².

The problem's formulation is as follows:

$$\begin{aligned}
 &\text{Minimize } f_1(X) = m = 2\pi\rho t x_1 \sqrt{w^2 + x_2^2}, \\
 &\quad f_2(X) = s = \frac{F}{2\pi t x_1 x_2} \sqrt{w^2 + x_2^2}, \\
 &\quad f_3(X) = d = \frac{F(w^2 + x_2^2)^{3/2}}{2\pi t E x_1 x_2^2} \\
 &\text{subject to } g_1(X) = \frac{F}{2\pi t x_1 x_2} \sqrt{w^2 + x_2^2} - \frac{1}{8} \pi^2 E \frac{t^2 + x_1^2}{w^2 + x_2^2} \leq 0, \\
 &\quad 1 \leq x_1 \leq 100, \\
 &\quad 10 \leq x_2 \leq 1000.
 \end{aligned} \tag{10}$$

TABLE 15: Optimal values for the objective function of test Problem 2.

X^{*i}	x_1	x_2	f_i^*
Working group 1	39.2944	335.6810	3956
Working group 2	100	1000	119.3662
Working group 3	100	1000	0.8881

TABLE 16: Objective function values table for test Problem 2.

	x_1	x_2	f_1	f_2	f_3
X^{*1}	39.2944	335.6810	3956	595	6
X^{*2}	100	1000	15315	119.3662	0.8881
X^{*3}	100	1000	15315	119.3662	0.8881

For this example, we assume that each objective function needs specific competencies so one objective function is assigned to a working group. The procedure proceeds with a director and three working groups.

Step 1. Each working group classifies its objective function:

Working group 1 classifies $f_1(X)$ in class 1S,

Working group 2 classifies $f_2(X)$ in class 1S,

Working group 3 classifies $f_3(X)$ in class 1S.

Step 2. Each working group solves its single optimization problem according to the category chosen in 1. The optimal solutions are X^{*i} , $i = 1, \dots, 3$. The optimal values of the objective functions are noted to be f_i^* , $i = 1, \dots, 3$ and are presented in Table 15.

Step 3. The director evaluates the two other objective functions at the three optimal solutions and constructs the 3×3 table of the objective functions' values. From Table 16, the director knows the best and the worst values for each objective function. These values are noted to be $b_{i\min}, b_{i\max}$, $i = 1, \dots, 3$. The approach proceeds by determining the reduced solvability set denoted by D' where $D' = \{D \mid b_{i\min} \leq b_i \leq b_{i\max}, i = 1, \dots, 3\}$ and D is the set of parameters for which the problem is solvable.

The reduced solvability set is

$$3956 \leq b_1 \leq 15315,$$

$$119.3662 \leq b_2 \leq 595,$$

$$0.8881 \leq b_3 \leq 6.$$

TABLE 17: Working group's preferences for test Problem 2.

Function Class		HD t_{i1}^+	D t_{i2}^+	T t_{i3}^+	U t_{i4}^+	HU t_{i5}^+
f_1	1S	4450	4550	4650	4750	4850
f_2	1S	370	390	400	450	500
f_3	1S	2	2.5	3	3.5	4

HD: (highly desirable $\leq t_{i1}^+$), D: ($t_{i1}^+ < \text{desirable} \leq t_{i2}^+$), T: ($t_{i2}^+ < \text{tolerable} \leq t_{i3}^+$), ID: ($t_{i3}^+ < \text{undesirable} \leq t_{i4}^+$), IA: ($t_{i4}^+ < \text{highly undesirable} \leq t_{i5}^+$).

Step 4. The director presents the reduced solvability set D' to the working groups to seek their preferences for each objective function. These values are set according to the working groups' knowledge and experience. For class 1S, each working group determines $t_{i1}^+, t_{i2}^+, t_{i3}^+, t_{i4}^+, t_{i5}^+$. Table 17 shows the degrees of desirability determined by Messac and Ismail-Yahaya [21]. These degrees of desirability are used to be able to compare the results. These degrees of desirability are realistic because they are inside the reduced solvability set determined in Step 3.

Step 5. Set solution $j = 1$. Each working group selects the target values b_i for its objective function. We assume that the working groups will not make a compromise, and they will choose target values in the highly desirable zone. The approach starts with the target value corresponding to t_{i1}^+ :

Working group 1 sets target value b_1 at 4450 (highly desirable),

Working group 2 sets target value b_2 at 370 (highly desirable),

Working group 3 sets target value b_3 at 2 (highly desirable).

Step 6. With the target values supplied by the working groups, the director uses the algorithm proposed by Dauer and Krueger [19] given in Appendix A to solve the multi-objective goal programming problem and to obtain a first Pareto optimal solution \bar{X}_1 :

$$\bar{X}_1 = (37.8392 \ 599.0083),$$

$f_1 = 4450$ (the value of f_1 is in the highly desirable zone),

$f_2 = 404.3889$ (the value of f_2 is in the undesirable zone),

$f_3 = 2.9618$ (the value of f_3 is in the tolerable zone).

Step 7. If the working groups are satisfied with this solution, stop and go to Step 13, if not, go to Step 8. For this problem, we assume that working group 2 is not satisfied since the value of its objective function is in the undesirable zone and wants to generate another solution. Go to Step 8. Steps 8, 9, and 10 are necessary to ensure that the working groups will choose target values leading to other Pareto-optimal solution.

TABLE 18: The reduced solvability set for test Problem 2.

Set no:	b_1 min	b_1 max	b_2 min	b_2 max	b_3 min	b_3 max
1	3956	4450	119	595	1	6
2	4450	15315	119	370	1	6
3	4450	15315	370	595	1	2

TABLE 19: Pareto-optimal solutions generated for Problem test 2.

Solution	Target values b_i	Objective function values f_i
1	$b_1 = 4450$ (highly desirable)	$f_1 = 4450$ (highly desirable)
	$b_2 = 370$ (highly desirable)	$f_2 = 404.3889$ (undesirable)
	$b_3 = 2$ (highly desirable)	$f_3 = 2.9618$ (tolerable)
2	$b_1 = 4600$ (tolerable)	$f_1 = 4600$ (tolerable)
	$b_2 = 395$ (tolerable)	$f_2 = 386.1490$ (desirable)
	$b_3 = 1.8$ (highly desirable)	$f_3 = 2.7917$ (tolerable)
3	$b_1 = 4565$ (tolerable)	$f_1 = 4565$ (tolerable)
	$b_2 = 369$ (highly desirable)	$f_2 = 390.0621$ (tolerable)
	$b_3 = 2.8$ (tolerable)	$f_3 = 2.8269$ (tolerable)

Step 8. The director formulates the KKT conditions for the problem and determines the values of the Kuhn Tucker multipliers associated with the goal constraints \bar{u}_r , $r = 1, \dots, k + m$

$$\bar{u}_2 = 0, \quad \bar{u}_3 = 0, \quad \bar{u}_4 = 0. \quad (11)$$

Step 9. According to the values \bar{u}_r , and by using the algorithm of Osman [20] given in Appendix B, the director determines the stability set $G(\bar{X}_j)$:

Given $\bar{u}_2 = 0$ and $g_2 = 4450$ then $b_1 \geq 4450$,

Given $\bar{u}_3 = 0$ and $g_3 = 370$ then $b_2 \geq 370$,

Given $\bar{u}_4 = 0$ and $g_4 = 2$ then $b_3 \geq 2$.

Step 10. The director uses the sets subtraction algorithm proposed by Abdel Haleem [17] given in Appendix C to obtain the reduced solvability set $\{D' - \bigcup_{p=1}^j G(\bar{X}_p)\}$ given in Table 18.

TABLE 20: Results' comparison.

Two-bar structure characteristics	Results IMOP approach	Results of Messac and Ismail-Yahaya [21]
Diameter (x_1)	3.80 cm	3.80 cm
Height (x_2)	64.2 cm	63.26 cm
Mass (f_1)	4.600 kg (Tolerable)	4.565 kg (Tolerable)
Normal stress (f_2)	386 N (desirable)	390 N (tolerable)
Vertical deflection (f_3)	2.7917 (tolerable)	2.826 (tolerable)

Step 11. If no target values can be chosen in $\{D' - \bigcup_{p=1}^j G(\bar{X}_p)\}$ stop and go to Step 13, otherwise go to Step 12. In this case, other values can be chosen in Table 18 so go to Step 12.

Step 12. Set $j = j + 1$. The working groups select other target values for the goal vector $b^j \in \{D' - \bigcup_{p=1}^{j-1} G(\bar{X}_p)\}$ and go to Step 6. Some solution results are presented in Table 19.

The second Pareto-optimal solution seems to be the best one because all the objective values are in the tolerable or desirable zone according to Table 17. This solution can be considered satisfactory and a good compromise for all the working groups.

Step 13. The director presents the Pareto-optimal solutions to the working groups to select the best solution for everyone (stop). If other solutions are necessary go to Step 12.

Table 20 shows the results obtained for the characteristics of the two-bar structure.

For the normal stress function, the result obtained with the IMOP approach is in the desirable zone while the solution obtained by Messac et Ismail-Yahaya [21] is in the tolerable zone according Table 17. This means that working group 2 is better satisfied with our solution. For the other functions, both results are in the same zone according Table 17. The difference between the results is that our solution is obtained by an interactive and collaborative process between the DM and the working groups and it is possible to generate several design scenarios (Pareto-optimal solutions) without changing the degrees of desirability. Messac and Ismail-Yahaya [21] provide information for only one design scenario (i.e., a single Pareto solution). If we want another solution we have to change the degrees of desirability. This IMOP algorithm has permitted to convergence to a solution that is acceptable for all the working groups. As shown, this procedure offers more flexibility for the director and his/her working groups.

5. Conclusion

The IMOP approach developed in this paper is an extension of the interactive nonlinear goal programming algorithm of Abdel Haleem [17]. The first contribution of the IMOP

algorithm is the ability to define a reduced set of target values that can be divided into degrees of desirability to capture the working groups' preferences. This is an important contribution because it is a challenging issue in multi-objective optimization. It also subtracts the stability set from the reduced set of target values at each iteration, thus ensuring a different Pareto-optimal solution each time. Also, the distribution of the objective functions among working groups is beneficial to consider disciplinary knowledge and experience in determining the degrees of desirability. The IMOP approach generates as many new Pareto optimal solutions (design alternatives) as needed. These solutions meet as much as possible the requirements of the working groups. Also, the application of the decision that rules for choosing the target values permits the convergence to Pareto-optimal solutions in the same desirability zone (or better) for all the objectives. The approach has been successfully applied to two problems. It is true that these problems are simple but they make the application of the IMOP approach clear. In this paper, the multi-objective optimization process is centralized. Future work is also planned to use the IMOP algorithm in the case where the multi-objective optimization process is not under the control of the director but distributed to the working groups. We will be interesting by multidisciplinary optimization. Multidisciplinary optimization is a methodology used for designing complex systems that must satisfy many constraints and that must be carried out in a decentralized environment. Multidisciplinary optimization assumes a form of collaboration between the working groups because the decision variables are under the control of several working groups. The multidisciplinary optimization approaches are Concurrent subspace optimization [22–24] Bilevel integrated system synthesis [24, 25] Collaborative optimization [22, 24, 26] and Analytical Target Cascading method [27]. We are working to combine the IMOP algorithm with one of these optimization approaches.

Appendices

A. Algorithm of Dauer and Krueger [19]

We consider the classical nonlinear goal programming problem with k goals (objective functions), subject o a set of constraints $\{M\}$:

$$\begin{aligned}
 \text{(NLGP):} \quad & f_1(X) \leq b_1 \\
 & f_2(X) \leq b_2 \\
 & \vdots \\
 & f_k(X) \leq b_k \\
 \text{subject to} \quad & M = \{X \in R^n \mid g_r(X) \leq 0, r = 1, \dots, m, X \geq 0\},
 \end{aligned} \tag{A.1}$$

where X is the vector of decision variables $\{x_1, x_2, \dots, x_n\}$ and $b_i, i = 1, \dots, k$ represent aspiration levels for objectives $f_i(X), i = 1, \dots, k$. The goals are arranged according to their priority levels, that is, if $i \leq j$ then goal $i, f_i(X) \leq b_i$ has a higher priority level than goal $j, f_j(X) \leq b_j$. It is well known

that the fundamental premise of goal programming is that goal i is sought to attain without regard to the attainability of the goals with lower priority level j . This idea has been used by Dauer and Krueger to develop an algorithm for solving linear, nonlinear, and integer goal programming problems. The algorithm solves k singles objective function problems successively. The first and last problems are as follows:

Solving the attainment problem for goal 1, P_1 is:

$$\begin{aligned} P_1: \quad & \text{Minimize } d_1 \\ & \text{subject to } f_1(X) - d_1 \leq b_1 \\ & g_r(X) \leq 0, \quad r = 1, \dots, m \\ & d_1 \geq 0, X \geq 0, \end{aligned} \quad (\text{A.2})$$

where d_1 is the positive deviation for objective $f_1(X)$ from its goal b_1 . The solution of this problem is d_1^* , which is the over attainment of goal 1.

The last attainment problem for goal k , P_k is

$$\begin{aligned} P_k: \quad & \text{Minimize } d_k \\ & \text{subject to } f_i(X) - d_i \leq b_i, \quad 1 \leq i \leq k \\ & d_i = d_i^*, 1 \leq i \leq k-1 \\ & g_r(X) \leq 0, \quad r = 1, \dots, m, \\ & d_k \geq 0, X \geq 0. \end{aligned} \quad (\text{A.3})$$

By letting $d_i = x_{n+k}$, $i = 1, \dots, k$ the last attainment problem can be written in the form

$$\begin{aligned} P'(G): \quad & \text{Minimize } x_{n+k} \\ & \text{subject to } g_r(X) \leq b_r, \quad r = 1, \dots, m \\ & x_a = x_a^*, \quad n+1 \leq a \leq n+k-1 \\ & x_{n+k} \geq 0, x_i \geq 0, i = 1, \dots, n, \end{aligned} \quad (\text{A.4})$$

where $X \in R^{n+k}$ and d_i^* , $1 \leq i \leq k-1$ is replaced by x_a^* , $n+1 \leq a \leq n+k-1$. The solution of this problem denoted by $\bar{X} = (\bar{x}_1, \bar{x}_2, \dots, \bar{x}_{n+k})$ is the optimal solution for the NLGP problem under consideration. Problem $P'(G)$ can be considered as a parametric programming problem having parameters b_r in the RHS of the constraints and can be written in the form

$$\begin{aligned} P(G): \quad & \text{Minimize } f(X) \equiv x_{n+k} \\ & \text{subject to } M(b) = \{X \in R^{n+k} \mid g_r(X) \leq b_r, \\ & \quad r = 1, \dots, k+m, X \geq 0\}, \end{aligned} \quad (\text{A.5})$$

where b_r is any arbitrary real number, and x_a^* , $n+1 \leq a \leq n+k-1$ have been directly substituted in the inequality constraints of $P'(G)$. The solution of problem $P(G)$ is thus the same as the solution of the $P'(G)$ and NLGP, and the stability sets of problem $P(G)$ can be calculated.

B. The Determination of the Stability Set

Osman (1977) presented the following algorithm for the determination of the stability set of the first kind:

- (1) Select an arbitrary $\bar{b} \in D$ and solve $P(G)$ to obtain \bar{X} and formulate the K.K.T. conditions.
- (2) Determine the values of \bar{u}_r using any available algorithm.
- (3) According to the values of \bar{u}_r , the stability set of the first kind $G(\bar{X})$ can be determined as follows:
 - (a) For $\bar{u}_r = 0$, $r = 1, \dots, k+m$, $G_1(\bar{X}) = \{b \mid b_r \geq g_r(\bar{X})\}$
 - (b) For $\bar{u}_r > 0$, $r = 1, \dots, k+m$, $G_2(\bar{X}) = \{b \mid b_r = g_r(\bar{X})\}$
 - (c) For $\bar{u}_r = 0$, $r \in J \subseteq \{1, \dots, k+m\}$, $\bar{u}_r > 0$, $r \notin J$, $G_J(\bar{X}) = \{b \mid b_r \geq g_r(\bar{X}), r \in J, b_r = g_r(\bar{X}), r \in J\}$, $G_3(\bar{X}) = \bigcup_{\text{possible } J} G_J(\bar{X})$.

C. The Sets Subtraction Algorithm [17]

Let b_i , $i = 1, \dots, k$ be the elements of the universal set V in the k dimensional space. V is considered a universal set from which some other sets S_i , $i = 1, \dots, I$ are subtracted. Let $V_s = \{\bigcup_{i=1}^I S_i, i = 1, \dots, I\}$ be the subtracted set. The elements contained in the universal set and the subtracted sets are used to determine the lower and the upper bounds for each set in each dimension. These values represent the input to the sets subtraction algorithm. Each set is represented as a record containing the lower and the upper bounds for each dimension as shown in Table 2.

The function of the algorithm is to get the difference between the universal set and the subtracted set $\{V - V_s\}$. This difference is defined as those elements that are contained in the set V and not contained in V_s . The subtraction is done in steps. First, the algorithm gets the difference between V and V_s , where $V_s = S_1$, thus getting $\{V - S_1\}$. Then the set S_2 is subtracted from $\{V - S_1\}$, thus getting $\{(V - S_1) - S_2\}$ and $V_s = \bigcup_{i=1}^I S_i$, and so on.

References

- [1] R. V. Tappeta and J. E. Renaud, "Interactive multiobjective optimization procedure," *AIAA Journal*, vol. 37, no. 7, pp. 881-889, 1999.
- [2] V. Chankong and Y. Y. Haimes, *Multiobjective Decision Making: Theory and Methodology*, vol. 8 of *North-Holland Series in System Science and Engineering*, Elsevier, New York, NY, USA, 1983.
- [3] F. Mistree, O. F. Hughes, and B. Bras, *Compromise Decision Support Problem and the Adaptive Linear Programming Algorithm, Structural Optimization: Status and Promise*, vol. 50 of *Progress in Astronautics and Aeronautics*, American Institute, Washington, DC, USA, 1993.

- [4] U. Diwekar, *Introduction to Applied Optimization*, vol. 80, Kluwer Academic, Boston, Mass, USA, 2003.
- [5] B. Suman and P. Kuman, "A survey of simulated annealing as a tool for single and multiobjective optimization," *Journal of the Operational Society*, vol. 57, pp. 1143–1160, 2006.
- [6] A. Suppakitnarm, K. A. Seffer, and G. T. Parks, "A simulated annealing algorithm for multiobjective optimization," *Engineering Optimization*, vol. 33, no. 1, pp. 59–85, 2000.
- [7] M. Reyes-Sierra and C. A. Coello Coello, "Multiobjective particle swarm optimizers: a survey of state-of-the-art," *International Journal of Computational Intelligence Research*, vol. 2, no. 3, pp. 287–308, 2006.
- [8] C. A. C. Coello, D. A. VanVeldhuizen, and G. Lamont, *Evolutionary Algorithms for Solving Multi-Objective Problems*, Kluwer Academic, Boston, Mass, USA, 2002.
- [9] D. E. Salazar and C. M. Rocco, "Solving advanced multi-objective robust designs by means of multiple objective evolutionary algorithms (MOEA): a reliability application," *Reliability Engineering and System Safety*, vol. 92, no. 6, pp. 697–706, 2007.
- [10] W. Gong and Z. Cai, "An improved multiobjective differential evolution based on Pareto-adaptive ϵ -dominance and orthogonal design," *European Journal of Operational Research*, vol. 198, no. 2, pp. 576–601, 2009.
- [11] H. A. Taboada, F. Baheranwala, D. W. Coit, and N. Wattanapongsakorn, "Practical solutions for multi-objective optimization: an application to system reliability design problems," *Reliability Engineering and System Safety*, vol. 92, no. 3, pp. 314–322, 2007.
- [12] A. Messac, S. M. Gupta, and B. Akbulut, "Linear physical programming: a new approach to multiple objective optimization," *Transactions on Operational Research*, vol. 8, pp. 39–59, 1996.
- [13] R. V. Tappeta, J. E. Renaud, A. Messac, and G. J. Sundararaj, "Interactive physical programming: tradeoff analysis and decision making in multicriteria optimization," *AIAA Journal*, vol. 38, no. 5, pp. 917–926, 2000.
- [14] V. Vassilev, S. C. Narula, and V. G. Gouljashki, "An interactive reference direction algorithm for solving multi-objective convex nonlinear integer programming problems," *International Transactions in Operational Research*, vol. 8, no. 4, pp. 367–380, 2001.
- [15] R. V. Tappeta and J. E. Renaud, "Interactive multiobjective optimization design strategy for decision based design," *Journal of Mechanical Design*, vol. 123, no. 2, pp. 205–215, 2001.
- [16] K. Miettinen and M. M. Mäkelä, "Synchronous approach in interactive multiobjective optimization," *European Journal of Operational Research*, vol. 170, no. 3, pp. 909–922, 2006.
- [17] B. Abdel Haleem, *A study on interactive multiple criteria decision making problems [Ph.D. thesis]*, Mechanical Design and Production Departement, Faculty of Engineering, Cairo University, 1991.
- [18] A. Lamghabar, S. Yacout, and M. S. Ouali, "Concurrent optimization of the design and manufacturing stages of product development," *International Journal of Production Research*, vol. 42, no. 21, pp. 4495–4512, 2004.
- [19] J. P. Dauer and R. J. Krueger, "An Iterative approach to goal programming," *Operational Research Quarterly*, vol. 28, no. 3, pp. 671–681, 1977.
- [20] M. S. A. Osman, "Characterization of the stability set of the first kind with parameters in the objective function," in *Proceedings of the 10th International Conference on Mathematical Programming*, Montreal, Canada, 1979.
- [21] A. Messac and A. Ismail-Yahaya, "Multiobjective robust design using physical programming," *Structural and Multidisciplinary Optimization*, vol. 23, no. 5, pp. 357–371, 2002.
- [22] J. Sobieszcanski-Sobieski and R. T. Haftka, "Multidisciplinary aerospace design optimization: survey of recent developments," *Structural Optimization*, vol. 14, no. 1, pp. 1–23, 1997.
- [23] R. V. Tappeta, S. Nagendra, and J. E. Renaud, "Concurrent Sub-Space optimization (CSSO) MDO Algorithm in iSIGHT: validation and testing," GE research & Development Center, 1998.
- [24] I. Kroo, *Distributed Multidisciplinary Design and Collaborative Optimization*, VKI lecture series on Optimization Methods & Tools for multicriteria/multidisciplinary Design, Stanford University, 2004.
- [25] J. Sobieszcanski-Sobieski, D. T. Altus, M. Philips, and R. Sandusky, "Bi-level System Synthesis (BLISS) for concurrent and distributed processing," AIAA-2002-5409, American Institute of Aeronautics and Astronautics, 2002.
- [26] R. D. Braun, *Collaborative optimization: an architecture for large-scale decentralized design [Ph.D. thesis]*, Stanford University, Stanford, Calif, USA, 1996.
- [27] H. M. Min, N. F. Michelena, P. Y. Papalambros, and T. Jiang, "Target cascading in optimal system design," *Journal of Mechanical Design*, vol. 125, no. 3, pp. 474–480, 2003.

