



Titre: Treatment of a mixed wood preservative leachate by a hybrid constructed wetland and a willow planted filter
Title:

Auteurs: Sophie Lévesque, Emmanuelle Demers, Jacques Brisson, & Yves Comeau
Authors:

Date: 2017

Type: Article de revue / Article

Référence: Lévesque, S., Demers, E., Brisson, J., & Comeau, Y. (2017). Treatment of a mixed wood preservative leachate by a hybrid constructed wetland and a willow planted filter. *Water Science and Technology*, 76(1), 164-171.
Citation: <https://doi.org/10.2166/wst.2017.197>

Document en libre accès dans PolyPublie

Open Access document in PolyPublie

URL de PolyPublie: <https://publications.polymtl.ca/9985/>
PolyPublie URL:

Version: Version finale avant publication / Accepted version
Révisé par les pairs / Refereed

Conditions d'utilisation: Tous droits réservés / All rights reserved
Terms of Use:

Document publié chez l'éditeur officiel

Document issued by the official publisher

Titre de la revue: Water Science and Technology (vol. 76, no. 1)
Journal Title:

Maison d'édition: IWA Publishing
Publisher:

URL officiel: <https://doi.org/10.2166/wst.2017.197>
Official URL:

Mention légale:
Legal notice:

Treatment of a mixed wood preservative leachate by a hybrid constructed wetland and a willow planted filter

Lévesque, S.¹, Demers E.², Brisson, J.², Comeau, Y.¹

¹Polytechnique Montréal: sophie.levesque@polymtl.ca; yves.comeau@polymtl.ca

²Université de Montréal et Institut de recherche en biologie végétale: emmanuelle.demers@umontreal.ca;

jacques.brisson@umontreal.ca

Abstract

The performance and removal mechanisms of a hybrid constructed wetland (HCW) followed by a willow planted filter (WPF) were evaluated for the treatment of a leachate contaminated by wood poles preservatives (PCP and CCA) to reach the storm sewer discharge limits. The HCW aimed to dechlorinate the PCP and PCDD/F and to remove metals by adsorption and precipitation. The HCW was efficient to remove PCP (>98.6%), oil, arsenic (99.4%), chromium (>99.2%), copper (>99.6%) and iron (29%) under their discharge limits, but it was unable to reach those of Mn and PCDD/F with residual concentrations of 0.11 mg Mn/L and 0.32 pg TEQ/L. Iron and manganese could be removed but were subsequently released by the HCW due to low redox conditions. No dechlorination of PCDD/F was observed since its chlorination profile remained the same in the different sections of the HCW. Adsorption was the most probable removal mechanism of PCDD/F. The WPF was able to remove some residual contamination, but it released Mn at a gradually decreasing rate. Total evapotranspiration of the leachate by a larger fertilized WPF and the construction of an underground retention basin are proposed to prevent any discharge of PCDD/F traces in the environment.

Keywords: constructed wetland, willow filter, dechlorination, adsorption, PCDD/F, evapotranspiration

Abbreviations:

CCA:	Chromated copper arsenate
CWs:	Constructed wetlands
HCW:	Hybrid constructed wetland
GC-MS:	Gas chromatography coupled with mass spectrophotometer
HSSF:	Horizontal sub-surface flow
OCDD:	Octachlorodibenzo-dioxin
PCDD/Fs :	Polychlorodibenzo-p-dioxins / polychlorodibenzofurans
PCP:	Pentachlorophenol
TCDD:	Tetrachlorodibenzo-p-dioxin
TEQ:	Toxic equivalent
WPF:	Willow planted filter
ZVI:	Zero valent iron

Introduction

Wood is widely used for industrial purposes in Canada, such as cross-ties and poles for electrical or communication lines support. They are usually treated with preservatives such as pentachlorophenol (PCP) or chromated copper arsenate (CCA) to prevent them from fungi and insects and extend their life expectancy (EPRI

2002). When newly treated and old wood poles are stored together outside in stockpiles, they come into contact with rainfall, creating a leachate that can contaminate the environment (Sudell 1992).

The leachate treatment technology installed next to a wood pole stockpile site consists of a system of constructed wetlands (CWs) and a willow planted filter (WPF) designed to treat the targeted contaminants, especially polychlorodibenzo-p-dioxins/polychlorodibenzofurans (PCDD/Fs), an impurity of PCP based preservatives.

PCDD/Fs, also known as “dioxins and furans” are molecules made of two benzene rings attached by one or two oxygen atoms and surrounded by one to eight chlorines (Gibson; *et al.* 1986). Among 210 congeners of PCDD/Fs, 17 are considered toxic and subject to environmental regulations. Congeners are weighted by a toxic equivalent factor and summed to calculate the toxic equivalent (TEQ) which is the regulated parameter (Van den Berg *et al.* 2006). A non-detect congener is not considered in the TEQ calculation.

The objective of this field study was to compare various extensive constructed wetland technologies to treat the wood pole stockpile leachate and meet municipal storm sewer discharge limits (CMM 2008). These discharge limits were 1 mg/L for arsenic, chromium and copper, 15 mg/L for iron, 0.1 mg/L for manganese, 15 mg/L for total oil and grease and 60 µg/L for PCP. For PCDD/Fs, the reference criterion was 0.0031 pg TEQ/L which is meant for the safety of piscivorous birds and mammals (Fenner 1995; MDDEFP 2013).

This paper focuses on the performances of one of the CWs that consisted of four sections and of the WPF to propose a final concept of a full-scale wood preservative leachate management strategy.

Methodology

Four different wetlands with intermediate sampling points were used to treat the leachate in parallel systems (sampling points P3 to P11; see Figure 1). Then, those pretreated effluents were mixed into one connecting point (P12) to be pumped into a willow planted filter for polishing. The effluent of the WPF (P13) was then sent to a storm sewer as illustrated in Figure 1 : Flow diagram of the wetland system from the wood poles stockpile (P1) to the storm sewer (P14)Figure 1.

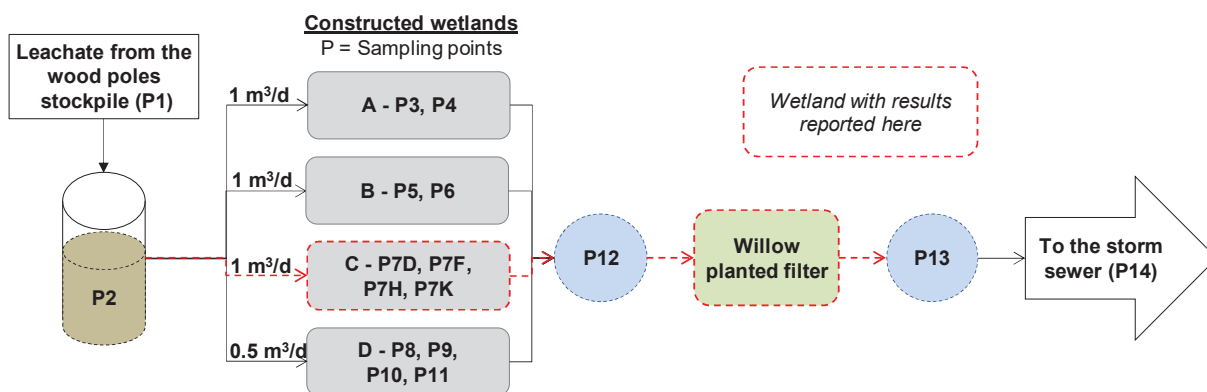



Figure 1 : Flow diagram of the wetland system from the wood poles stockpile (P1) to the storm sewer (P14). Only one of the constructed wetlands (CW C) and the willow planted filter are reported in this paper. P1 to P14 are sampling points.

1
2
3 66 The treatment system was operated from May to November of 2012 to 2015. The system was hibernated from
4 67 December to April due to the cold climate that freezes the soil and leachate. A concentrated leachate made from
5 68 wood pole embedment ends, macerated in water was spiked to the leachate (6% v/v) in 2012 at P2 to reach more
6 69 quickly the end of life of the system. From July 2013, only the leachate was pumped into the system.

7
8 70 The wood stockpile area has a surface of 2240 m² and receives approximately 1 m of precipitation every year.
9 71 Under the poles, a storage volume of 514 m³ is available. Throughout the year, the leachate volume varies
10 72 depending on the precipitation and evaporation in the basin, and on the treatment capacity of the wetland system.

11
12 73 The wetland under study (CW C) consisted of a 0.8 m deep and 40 m² horizontal subsurface flow (HSSF) hybrid
13 74 constructed wetland receiving 1 m³/d and consisted of four sequential sections, one wetland and three filters,
14 75 separated by empty plastic permeable sampling boxes (Figure 2). The first section was filled with sand (52%),
15 76 blond peat (40%) and zero valent iron powder (ZVI; 25µm; 8%v) and was maintained under anaerobic conditions
16 77 by a top geomembrane. The function of this section was to dechlorinate highly chlorinated congeners of PCP and
17 78 PCDD/Fs. The second section was filled with sand (75%), black peat (25%) and calcined clay (5%), was equipped
18 79 with forced aeration and was planted with *Phragmites australis*. This wetland section (identified “aerobic” in
19 80 Figure 2) aimed to oxidize contaminants and dechlorinate the lower chlorinated congeners of PCP and PCDD/Fs.
20 81 The third section was filled with electric arc furnace steel slag to remove metals, especially ZVI escaping from the
21 82 first section. The fourth section was made of 100% blond peat to neutralize the high pH arising from the steel slag
22 83 section.

23
24 84 The HSSF willow planted filter (*Salix miyabeana* SX67) was 48 m², 1.5 m deep and filled with sand (80%) and
25 85 brown peat (20%). Its function was to treat the residual contamination and to evapotranspire some of the 3.7 m³/d
26 86 of leachate coming from the four HCWs.

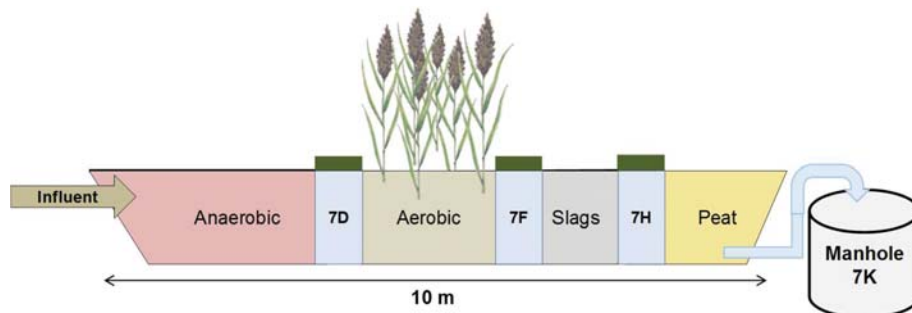

44
45 89 **Figure 2 : Four sections of the hybrid constructed wetland (HCW) and sampling points**

46 90 Monitoring was made twice a month to collect data for pH, redox potential (ORP), temperature and conductivity.
47 91 Sampling campaigns for potential pollutants were made three to four times per year (total of 14 campaigns) at
48 92 every intermediate point (P2, P7D, P7F, P7H, P7K, P12 and P13; Figure 1; Figure 2). Measures and sampling are
49 93 made approximately at mid-water depth. Analyses included As, Cr, Cu, Fe, Mn, total oil and grease, PCP,
50 94 PCDD/Fs, and many other parameters that are not presented in this paper, all of which were analyzed in an
51 95 certified laboratory. Plant biomass from the HCW and WPF was sampled in October 2013 for analyses of As, Cr,
52 96 Cu, PCP and PCDD/Fs. Roots were rinsed with tap water, while aerial parts have had no special treatment before
53 97 being stored in glass jar at 4°C (Demers, 2015) The substrate in each section of the HCW was also sampled for
54 98 PCDD/Fs contamination in 2015 to determine if it had to be managed as contaminated soils.

1
2 98 Considering the initially high detection limits and many non-detects (or censored data), statistical analysis of the
3
4 99 data for metals included modelling of left censored data with regression on order statistic (ROS) model using R
5100 software and especially the NADA package . This statistical treatment was made on datasets having successfully
6101 passed a Shapiro test to conclude about the normality or log normality of their distribution. The datasets that
7102 failed the Shapiro test were compared but no modeled data were generated. To determine the difference between
8
9103 two sets of data, the function *cenDiff* and/or Wilcox test was used (p-value < 0.05; Lee 2013).

10
11104 PCDD/Fs are measured by gas chromatography coupled with high resolution mass spectrophotometer (GC-
12105 HRMS) by a standard governmental method (CEAEQ 2011). The detection limits are different for every congener
13106 and for every sample because it is based on the final extraction volume, the recovery rate of standards, the
14
15107 extraction column performance and other parameters. For the analysis of the PCDD/F removal, only the eight
16108 chlorine dioxin congener (OCDD) was used to measure the performance of the process because the others were
17109 often under their detection limit and could not be modelled. The removal efficiency was calculated either on the
18110 basis of an arithmetical removal or the log removal.
19

20
21 **Arithmetic removal formula** $\% \text{ removal} = ([Metal]_{in} - [Metal]_{out})/[Metal]_{in} \times 100\%$

22
23 **Log removal formula** $\text{Log removal} = \log_{10}[OCDD]_{in} - \log_{10}[OCDD]_{out}$

24 25111 **Results & Discussion**

26112 **Operating conditions**

27
28113 The leachate showed an average pH of 6.4 and a redox potential of -67 mV. Throughout the HCW, the ORP
29114 decreased in the anaerobic section (P7D) and became positive in the aerobic one (P7F). Downstream from point
30
31115 P7F, the redox potential gradually decreased until -170 mV at the HCW effluent point (P7K). The pH was neutral
32116 in the first section, but variable in the aerobic section (7.0 to 10.6), probably due to some back-mixing from the
33117 slag section. The peat was able to neutralize the pH from 11.0 in the slag section to 7.7 on average, during the
34118 whole duration of the experiment.
35

36
37119 The flow of leachate pumped into the four wetlands was not constant in the four years of operation due to
38120 variation of the precipitation, and thus, total quantity of leachate to treat. The leachate flow ranged from 0.5 m³/d
39121 to 1.0 m³/d and the rain falling directly into the HCW contributed with 0.1 m³/d to the flow on average. Extremes
40122 of 2.3 m³/d to 4.5 m³/d of pre-treated effluent and rain was filtered through the willow planted filter depending on
41
42123 the weather. There was no sign of surface runoff or clogging in the first four years of operation.

43
44124 The evapotranspiration in the HCW was observed through the variation of up to 36% of the outflow between hot
45125 summer days and nights, but could not be precisely evaluated due to a lack of recorded data of the inflow. The
46126 expected mean evapotranspiration in summer is around 3 mm/d to 4 mm/d for *Phragmites australis* (Burba *et al.*
47127 1999; Born *et al.* 2011) which represents 0.14 m³/d or 17% of the inflow in the HCW. For the WPF, 5.3 mm/d is
48
49128 expected to be evacuated by evapotranspiration on average (Guidi *et al.* 2008; Coreen & Gill 2015), which
50129 represents a potential of 0.25 m³/d or 7% of the total 3.5 m³/d theoretical pumped influent.
51

Metals and Metalloids

Metal analysis of the leachate showed that the macerated water did not have a significant influence on the CCA concentrations (As, Cr, Cu). An increased concentration of CCA would be useful to estimate the limitations of the HCW treatment capacity, which were not reached in this study.

The arsenic (As) mean concentration in the leachate was 0.77 mg/L and was removed at a level of 96.2% by the first anaerobic section (Figure 3A – P7D). This removal was attributed to chemisorption onto peat, in particular with humic substances (Palmer *et al.* 2015) The aerobic section, brought the removal of up to 99.5% (P7F). Downstream from this point, there was no significant change in As concentration in the slag and peat sections (Figure 3A). The four parallel wetlands together were able to remove 88.5% of As. The WPF was able to treat 81.8% of the residual As contamination with a final average of 0.016 mg/L over four years. The As concentration was not significantly different throughout each season or year of the study.

Chromium (Cr) and copper (Cu) were removed by the first two sections like arsenic, but were below the detection limit (0.001 mg/L) in points P7F to P7K. From an influent concentration of 0.13 mg/L and 0.26 mg/L, respectively, Cr and Cu were removed at 95.6% and 91.7% in the anaerobic section. The four parallel wetlands together removed 89.9% of the chromium and 89.7% of the copper. The WPF removed 68.6% and 81.5% of the residual Cr and Cu with a final average concentration of 0.004 mg/L and 0.005 mg/L during the four years of operation.

Constructed wetlands A, B and C had similar performances, but CW D did not perform as well because it was designed to compare four different macrophyte species (in parallel CWs) and not to treat the leachate.

There are three main removal mechanisms for As, Cr and Cu in the HCW and the WPF: adsorption onto peat, co-precipitation with Fe and Mn oxyhydroxides and bioaccumulation. The adsorption onto peat is used for the retention of diverse contaminants in water treatment and wetlands, including As, Cr and Cu (Sen Gupta *et al.* 2009; Hu *et al.* 2010; Palmer *et al.* 2015). This removal mechanism is efficient until the saturation of the media, which depends on the amount of adsorption sites. The adsorption rates depend on the cation exchange capacity (CEC) and the contaminant concentration. Since most of the treatment is made in the first two sections which contain peat, adsorption is probably occurring in the HCW. The diminution of the efficiency of the anaerobic section would be a sign of saturation of the media and must be monitored.

Precipitation and co-precipitation of CCA contaminants with iron and manganese hydroxide can occur in wetland systems and can be a problem if they dissolve further in anaerobic conditions (Keon *et al.* 2001; Kadlec & Wallace 2009; Pedescoll *et al.* 2015). In this pilot experiment, no dissolution of As, Cr and Cu were observed even though Fe and Mn release were occurring in the last section of the HCW and in the WPF, hence, co-precipitation may not be the main removal mechanism. The bioaccumulation of As, Cr and Cu are observed in treatment wetlands, but it could not be confirmed in the present study due to high detection limits (Bragato *et al.* 2009; Demers 2015). The HCW and WPF were able to treat the contamination efficiently from CCA preservative under the discharge criteria and did not reach their end of life after four years of operation.

The Fe concentration in the HCW increased occasionally at the end of the AN section, probably because of leaching from the ZVI powder. The subsequent sections (OX and Slag) were efficient to remove iron and it was below the detection limit of 0.07 mg/L in the effluent (Figure 3B).

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

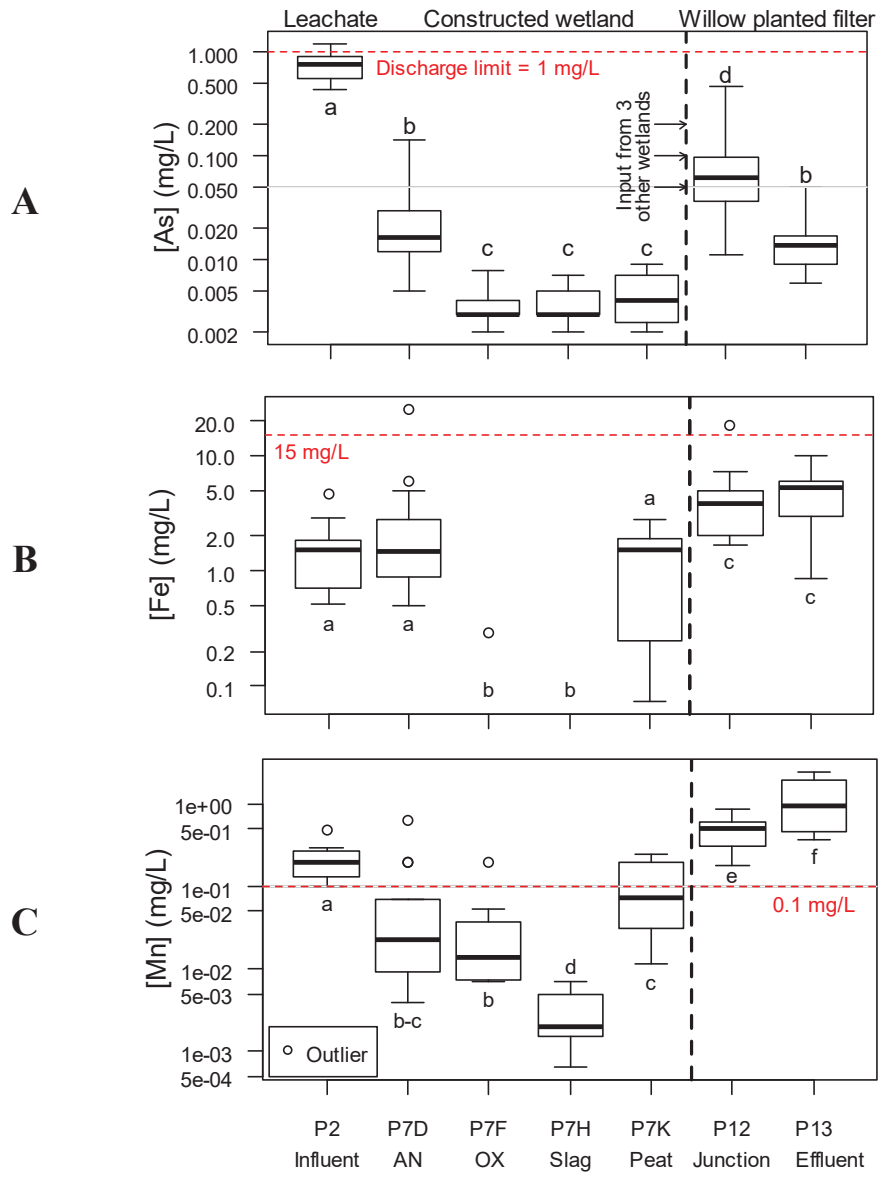


Figure 3 : Efficient removal of arsenic (A), iron (B) and manganese (C) concentrations by the first sections of the HCW and release of Fe and Mn by the peat section. The willow planted filter removes As, has no impact on Fe and releases Mn and. Note: the letters “a to f” represent statistically different concentration for a contaminant.

The main removal mechanism of Fe in the OX section was probably oxidation due to the forced aeration, favouring precipitation. The peat section released Fe, giving a mean effluent concentration of 1.2 mg/L. The proposed explanation for this was the solubilization of the blond peat or of iron oxide precipitates retained in it. Globally, the HCW did not affect the Fe concentration, since P2, P7D and P7K were not statistically different.

1
2 178 The manganese (Mn) average concentration in the influent leachate was 0.21 mg/L, which exceeded the discharge
3 179 limit criteria of 0.1 mg/L. The anaerobic section was able to remove 57% of the Mn, the aerobic section brought
5 180 the removal efficiency up to 83% and the slag section to 99%. Just like for the iron, the redox and pH conditions
6 181 were considered responsible for the removal of Mn. The peat section (P7K) released increasing concentrations of
7 182 manganese such that the total removal of the HCW was 47% (effluent of 0.11 mg/L) over four years. The blond
8 183 peat may be aging or oxidizing over time. At the junction of the wetlands (P12), the Mn was twice the initial
10 184 concentration and the WPF released even more Mn as shown by its average of 1.3 mg/L effluent concentration
11 185 (P13). The brown peat in the substrate of the WPF and other wetlands must have released Mn. Contrarily to the
12 186 HCW, the WPF showed a gradual decrease in Mn release over time from 2.1 mg/L in 2012 to 0.4 mg/L in 2015.
13 187 The Mn may be drained from the substrate and/or translocated into the willow's biomass. The maximum heights
15 188 of willows recorded were 2,65 m in 2012, 2,83 m in 2013 and 2,6 m in 2014 while the number of stem was 3, 11
16 189 and 14 for the same years with a medium diameter of 2 cm. All individuals survived (Demers, 2015).
17

18 190 Iron and manganese release is often observed in HSSF constructed wetlands, because of their redox sensitivity
19 191 that tends to decrease in time and stages of the wetlands, enhancing the re-dissolution of oxyhydroxides
20 192 precipitates (Kadlec & Wallace 2009; Pedescoll *et al.* 2015) Hence, the addition of forced aeration at the end or in
21 193 the WFP may be enough to address the Mn exceeding concentrations. The efficiency of a slag filter for the
22 194 retention if iron could not be evaluated clearly in the HCW, since the aerobic section was sufficient to treat it.
24 195 However, the slag section was the most effective process for the removal of Mn and it is considered promising for
25 196 the retention of Fe and Mn in wetland systems.
26

27 28 197 **Organic contaminants**

29
30 198 The addition of macerated water resulted in a high concentration of organic contaminants in the influent as
31 199 indicated by average values of 210 µg PCP/L and 700 pg TEQ/L of PCDD/F in 2012, compared to 2.7 µg PCP/L
32 200 and 130 pg TEQ/L of PCDD/F after 2012. With or without the spiked influent, however, PCP, hydrocarbons, oil
33 201 and grease were easily removed by the first anaerobic section (P7D; < 1 µg PCP/L; < 0.1 mg/L C₁₀-C₅₀
34 202 hydrocarbons; < 3 mg/L of total oil and grease).
35 203

36
37 204 The PCDD/F toxic equivalent was almost always over the discharge criterion at every stage of the system whether
38 205 the influent leachate was spiked with a concentrated leachate or not. To reach the criterion of 0.0031 pg TEQ/L, a
39 206 total of 4.9 log removal (99.998%) of PCDD/F would have been required on average.
40

41
42 207 Most of the OCDD was removed at the beginning of the HCW in the anaerobic and aerobic sections (Figure 4).
43 208 The slag section had a small negative impact on the removal of OCDD and the peat section a positive one,
44 209 bringing the total removal of the HCW to 3.3 log removal (99.95%). The WPF was also able to retain some of the
45 210 residual OCDD (87.1%), but the final concentration is similar to the anaerobic section. Overall, the wetland
46 211 system could not reach the objective of 4.9 log removal. On some occasions, the criterion of 0.0031 pg TEQ/L
47 212 was reached, but this was essentially attributed to occasional higher detection limits, bringing the toxic equivalent
48 213 calculation of a congener to zero in case of non-detection. The removal efficiency of OCDD remained relatively
49 214 constant over the four years of operation.
50
51
52

1
2
3 216

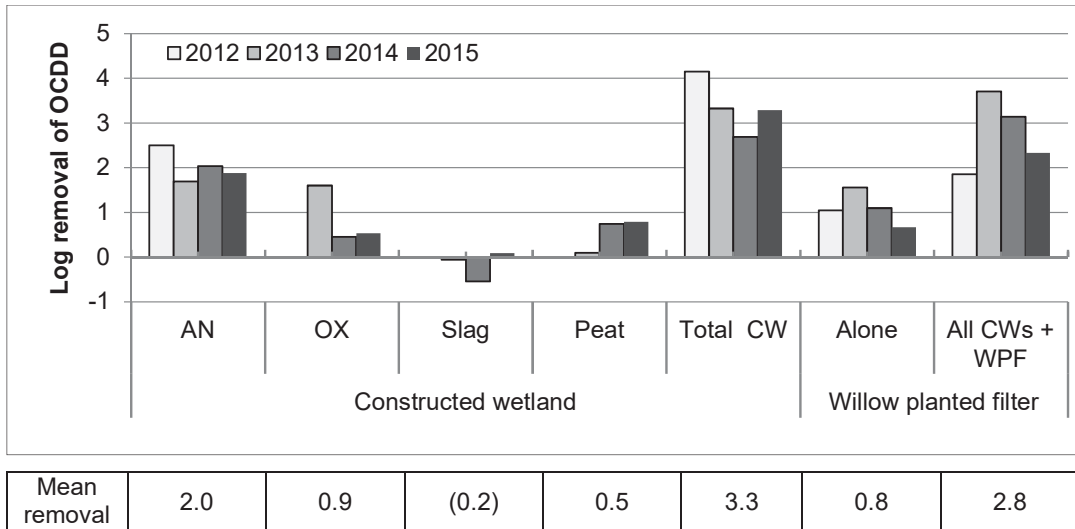


Figure 4 : The most efficient sections to remove OCDD are the first two sections of the HCW and the WPF because they are receiving the highest concentrations.

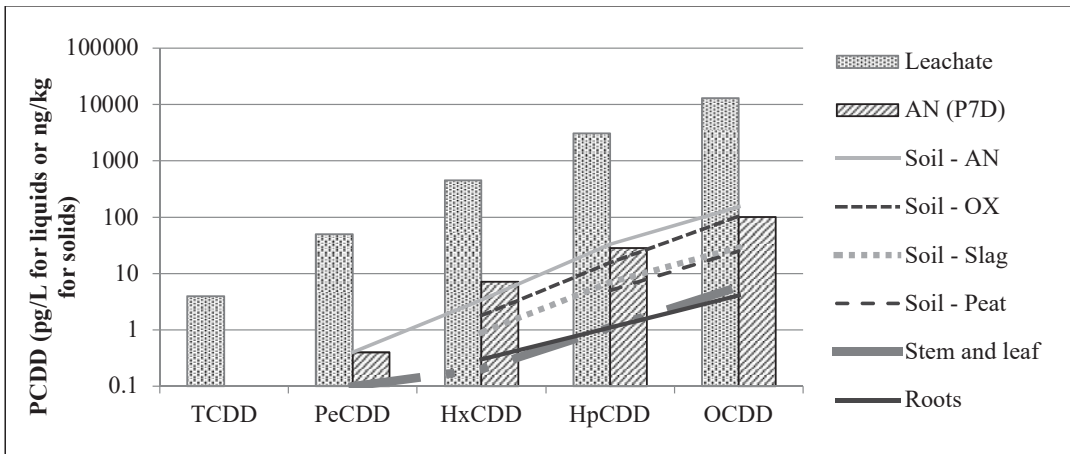


Figure 5 : The PCDD isomers concentration profile is the same in the leachate and the anaerobic section effluent, in the substrate of the four sections and the biomass of the constructed wetland. Note: the same profile was observed for furan isomers.

Although PCDD/Fs dechlorination was first assumed to be an important removal mechanism, it appeared that adsorption may have been the dominant removal mechanism during the study for three main reasons: most of the removal was achieved at the beginning of the HCW (Figure 4), the chlorination profile was stable throughout the sections of the HCW and the same profile was found in the different phases (water, soil and biomass) of the HCW

65

(Figure 5). The adsorption rate is directly correlated with the concentration, which is always higher upstream in the treatment. If the ZVI in the anaerobic section was able to remove chlorine from the highly chlorinated congeners, they would be found at lower concentrations while the lower chlorinated congeners would increase in concentration, especially when the OCDD is much more present than the TCDD (10 000:1). Instead, the profile keeps the same slope and the ratio of contamination (anaerobic relatively to leachate) is stable for every isomer (Figure 5). The symmetry of the water contamination in the soils and in the biomass of macrophytes confirms those conclusions. The substrate of the HCW is decreasingly contaminated (from the first to the last sections) and the PCDD/F profile is the same in substrates, the biomass and the water, showing no degradation of the highly chlorinated congeners or increase of the lowest chlorinated congeners.

Removal by adsorption also means that PCDD/Fs are accumulating in the substrate rather than being degraded. Thus, the saturation of the anaerobic section substrate is expected, but the end of life could not be predicted. The saturation is observed when the efficiency starts to decrease in the first sections. The management of the substrates at the dismantlement of the pilot must also consider soil contamination. The few measures of biomass and media contamination show that the accumulation of PCDD/F was not sufficient to consider them as hazardous waste according to the regulation applicable.

Full-scale implementation

Since the PCDD/F removal objective could not be achieved by the treatment system studied, the total evapotranspiration of the leachate by the WPF was considered. This pilot scale study was able to demonstrate the capacity of willows to survive and grow in a pre-treated effluent. Further studies on willow evapotranspiration capacity should lead to a full-scale conception with a larger WPF able to respond to the needs of the site. These studies could include the impact of fertilization, of pruning of the willows and of a free surface flow design on the evapotranspiration potential of a WPF.

For a full-scale implementation, other elements should be taken in consideration, especially the construction of a retention basin to manage the total amount of leachate and the separation of the CCA and PCP treated wood poles to create two distinct leachates. CCA treated wood poles leachate could be treated by a hybrid constructed wetland with an added aeration without polishing by a WPF, while PCP treated wood poles leachate could be treated by a simpler hybrid constructed wetland composed of anaerobic and aerobic sections followed by an underground retention basin upstream of a larger total evapotranspiration WPF.

Conclusion

The *in situ* treatment system consisting of a hybrid constructed wetland and a willow planted filter was able to treat a mixed wood preservative leachate and meet discharge criteria for chromium, copper, arsenic, iron, PCP and oil, but not for manganese nor PCDD/Fs. Most metals were removed by oxidation, precipitation or adsorption onto the substrate. The main removal mechanism for PCDD/Fs was adsorption and not dechlorination as initially hypothesized. Considering this, a prospective decline in removal efficiency is expected in years to come and the substrate should be monitored to comply with regulations before dismantlement. As a short-term solution to remove the excess manganese, passive or forced aeration added in or after the WPF is proposed.

For the implementation of a full-scale leachate management system, it would be advisable to separate the PCP and CCA poles storage areas to be able to manage them differently. CCA leachate would be treated with the same configuration of HCW without WPF while PCP leachate would be first sent to a system composed of anaerobic

1
2 260 and aerobic zone CWs followed by underground retention basins upstream of a total evapotranspiration willow
3
4 261 planted filter.

5
6 262
7
8 263 **References**
9

- 10 264 Borin, M., Milani, M., Salvato, M., & Toscano, A. (2011). Evaluation of *Phragmites australis* (Cav.) Trin.
11 265 evapotranspiration in Northern and Southern Italy. *Ecological Engineering*, 37(5), 721-728.
12 266 doi:10.1016/j.ecoleng.2010.05.003
- 13 267 Bragato, C., Schiavon, M., Polese, R., Ertani, A., Pittarello, M., & Malagoli, M. (2009). Seasonal variations of Cu,
14 268 Zn, Ni and Cr concentration in *Phragmites australis* (Cav.) Trin ex steudel in a constructed wetland of
15 269 North Italy. *Desalination*, 246(1), 35-44. doi:http://dx.doi.org/10.1016/j.desal.2008.02.036
- 16 270 Burba, G. G., Verma, S. B., & Kim, J. (1999). Surface energy fluxes of *Phragmites australis* in a prairie wetland.
17 271 *Agricultural and Forest Meteorology*, 94(1), 31-51. doi:http://dx.doi.org/10.1016/S0168-1923(99)00007-6
- 18 272 CEAEQ. (2011). Détermination des dibenzo-para-dioxines polychlorés et dibenzofuranes polychlorés : Dosage par
19 273 chromatographie en phase gazeuse couplée à un spectromètre de masse. (MA. 400 – D.F. 1.1). Retrieved
20 274 from <http://www.ceaeq.gouv.qc.ca/methodes/pdf/MA400DF11.pdf>.
- 21 275 Communauté Métropolitaine de Montréal (2008). *Règlement numéro 2008-47 sur l'assainissement des eaux (Rule*
22 276 *number 2008-47 on water treatment)*, Québec, (PDF) 13 p. and 2 Appendices.
- 23 277 Curneen, S., & Gill, L. (2015). Upflow evapotranspiration system for the treatment of on-site wastewater effluent.
24 278 *Water*, 7(5), 2037.
- 25 279 Demers, E. (2015). *Effet des macrophytes aquatiques sur le traitement d'eau contaminée à l'ACC et au PCP*.
26 280 (M. Sc.), Institut de recherche en biologie végétale, Université de Montréal, Montréal.
- 27 281 EPRI. (2002). Treated Wood Poles: In Use in the Environment. Retrieved from
28 282 http://wooddoc.org/utills/General/EPRI_Treated_Wood_Poles_In_Use_In_the_Environment_QA.pdf
- 29 283 Fenner, K. A. (1995). *Final water quality guidance for the great lakes system*. Office of the Federal Register,
30 284 National Archives and Records Administration Retrieved from <https://www.gpo.gov/fdsys/pkg/FR-1995-03-23/pdf/95-6671.pdf>.
- 31 285
32 286 Gibson, G. G., & Skett, P. (1986). Factors affecting drug metabolism: external factors. In *Introduction to Drug*
33 287 *Metabolism* (pp. 256). Cheltenham, UK: Nelson Thornes.
- 34 288 Guidi, W., Piccioni, E., & Bonari, E. (2008). Evapotranspiration and crop coefficient of poplar and willow short-
35 289 rotation coppice used as vegetation filter. *Bioresource Technology*, 99(11), 4832-4840.
36 290 doi:http://dx.doi.org/10.1016/j.biortech.2007.09.055
- 37 291 Helsel, D. R. (2012). *Statistics for censored environmental data using Minitab and R* (2nd ed.). Hoboken, N.J.:
38 292 Wiley.
- 39 293 Hu, L., Diez-Rivas, C., Hasan, A. R., Solo-Gabriele, H., Fieber, L., & Cai, Y. (2010). Transport and interaction of
40 294 arsenic, chromium, and copper associated with CCA-treated wood in columns of sand and sand amended
41 295 with peat. *Chemosphere*, 78(8), 989-995. doi:http://dx.doi.org/10.1016/j.chemosphere.2009.12.019
- 42 296 Kadlec, R. H., & Wallace, S. D. (2009). *Treatment wetlands* (2nd ed.). Boca Raton, FL: CRC Press.
- 43 297 Keon, N. E., Swartz, C. H., Brabander, D. J., Harvey, C., & Hemond, H. F. (2001). Validation of an arsenic
44 298 sequential extraction method for evaluating mobility in sediments. *Environmental Science & Technology*,
45 299 35(13), 2778-2784. doi:10.1021/es001511o
- 46 300 Lee, L. (2013). NADA: Nondetects and data analysis for environmental data [R package]. Retrieved from
47 301 <https://CRAN.R-project.org/package=NADA>
- 48 302 Palmer, K., Ronkanen, A.-K., & Kløve, B. (2015). Efficient removal of arsenic, antimony and nickel from mine
49 303 wastewaters in Northern treatment peatlands and potential risks in their long-term use. *Ecological*
50 304 *Engineering*, 75, 350-364. doi:http://dx.doi.org/10.1016/j.ecoleng.2014.11.045

1
2 305 Pedescoll, A., Sidrach-Cardona, R., Hijosa-Valsero, M., & Bécarea, E. (2015). Design parameters affecting metals
3 306 removal in horizontal constructed wetlands for domestic wastewater treatment. *Ecological Engineering*,
4 307 80, 92-99. doi:http://dx.doi.org/10.1016/j.ecoleng.2014.10.035
5 308
6 308 Ministère du Développement durable, de l'Environnement de la Faune et des Parcs (MDDEFP), 2013. *Critère de la*
7 309 *qualité de l'eau de surface (Criteria for the quality of surface water)*, 3rd edition, Québec, 510 p. and 16
8 310 Appendices.
9 311 Sen Gupta, B., Curran, M., Hasan, S., & Ghosh, T. K. (2009). Adsorption characteristics of Cu and Ni on Irish peat
10 312 moss. *Journal of Environmental Management*, 90(2), 954-960.
11 313 doi:http://dx.doi.org/10.1016/j.jenvman.2008.02.01
12 314 Sudell, G., Selvakumar, A., Wolf, G. (1992). Contaminants and Remedial Options at Wood Preserving Sites. U.S.
13 315 EPA Retrieved from <http://nepis.epa.gov/Exec/ZipURL.cgi?Dockey=30002OK5.txt>.
14 316 Van den Berg, M., Birnbaum, L. S., Denison, M., De Vito, M., Farland, W., Feeley, M., Peterson, R. E. (2006). The
15 317 2005 World Health Organization Re-evaluation of Human and Mammalian Toxic Equivalency Factors for
16 318 Dioxins and Dioxin-like Compounds. *Toxicological sciences*, 93(2), 223-241. doi:10.1093/toxsci/kfl055